
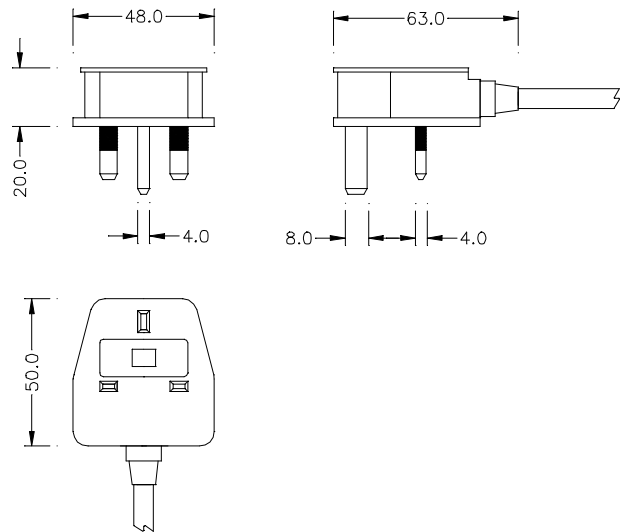


C 18 C
Non Rewireable 250V UK Plug
Fuse Ratings: 2Amp 3Amp 5Amp 10Amp & 13Amp
To BS 1363
Licence KM 21204

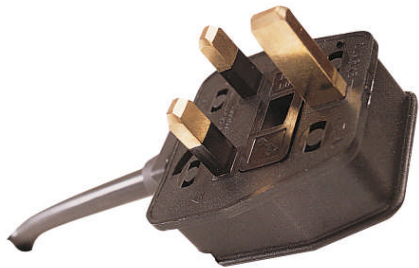

General Description

The pins are integrally moulded into the thermoplastic base.

A rigid thermoplastic cover incorporates a unique interlocking feature.

The product is supplied with either brass or integrally moulded earth pin

Fitted with a BS 1362 approved fuse

Fuse Ratings: 2Amp 3Amp 5Amp 10Amp & 13Amp

All cordsets are 100% electrically tested

Approved by BSI - Licence No. KM 21204

See attached Cable Approvals

The Company is approved to ISO 9001: 2000 Certificate No. FM 00928



Cable Approvals for C18C

Cable size	Cable type
2 x 0.5 mm ²	H03 VVH2-F
3 x 0.5 mm ²	H03 VV-F
2 x 0.75 mm ²	H03 VVH2-F
2 x 0.75 mm ²	H05 VV-F
2 x 0.75 mm ²	H05 VV-F
2 x 0.75 mm ²	H03 V2V2H2-F
3 x 0.75 mm ²	H05 VV-F
3 x 0.75 mm ²	H05 VV-F
3 x 0.75 mm ²	H05 VV-F
3 x 0.75 mm ²	H05 V2V2-F
3 x 0.75 mm ²	H05 RN-F
2 x 1.00 mm ²	H05 VV-F
3 x 1.00 mm ²	H05 RR-F
3 x 1.00 mm ²	H05 RR-F
3 x 1.00 mm ²	H05 VV-F
3 x 1.00 mm ²	H05 VV-F
3 x 1.00 mm ²	H05 VV-F Eurothern
3 x 1.00 mm ²	H05 V2V2-F
3 x 1.50 mm ²	H05 VV-F

