


C 18 M
Non Rewireable 250V Moulded UK Plug
Fuse Ratings: 2Amp 3 Amp 5 Amp 10 Amp 13 Amp
To BS 1363 Pt 1 1995
Licence No. 21204

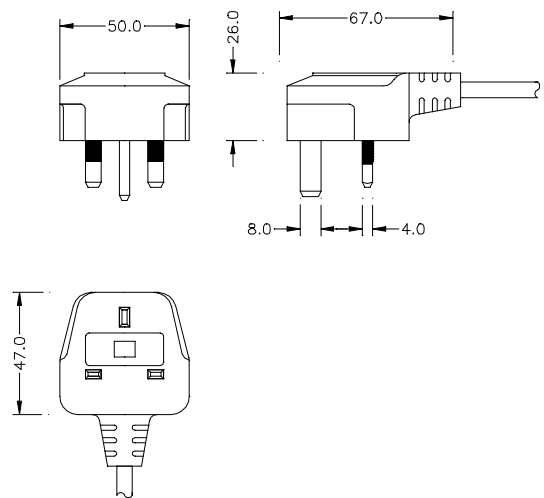

General Description

The pins are integrally moulded into thermoplastic glass filled polyester

A rigid inner cap gives additional strength and security

Both are over moulded with resilient flame retardant PVC

Fitted with a BS 1362 approved fuse

Fuse Ratings: 2Amp 3 Amp 5 Amp 10 Amp 13 Amp

All cordsets are 100% electrically tested

See attached Cable Approvals

The Company is approved to ISO 9001: 2000 Certificate No. FM 00928



Cable Approvals for C18M

Cable size	Cable type
2 x 0.75 mm ²	H05 VV-F
2 x 0.75 mm ²	H05 RN-F
2 x 0.75 mm ²	H05 V2V2-F
3 x 0.75 mm ²	H05 VV-F
3 x 0.75 mm ²	H05 RN-F
2 x 1.00 mm ²	H07 RN-F
2 x 1.00 mm ²	H05 VV-F
2 x 1.00 mm ²	H05 V2V2-F
3 x 0.75 mm ²	H05 VV-F
3 x 1.00 mm ²	H05 RN-F
3 x 1.00 mm ²	H05 RR-F
3 x 1.00 mm ²	H05 VV-F
2 x 1.50 mm ²	H05 VV-F
3 x 1.50 mm ²	H05 VV-F
3 x 1.50 mm ²	H05 V2V2-F
3 x 1.50 mm ²	H05 RR-F
3 x 1.50 mm ²	H07 RN-F
3 x 2.50 mm ²	H05 VV-F

